



F12 PWM PST CO

PWM PST Case Fan for Continuous Operation


- Japanese brand dual ball bearing provides a longer life span
- Ideal for continuous operation with exceptional stability
- PWM Sharing Technology (PST)
- Extremely quiet with low noise impeller
- High airflow and static pressure



F12 PWM PST CO

PWM PST Case Fan for Continuous Operation

The **F12 PWM PST CO** fans aim to offer superior durability and cooling performance for demanding and continuous-operating PCs. With the PWM Sharing Technology (PST), the **F12 PWM PST CO** fans regulate the fan speed based on the actual needs with optimal cooling performance and noise control at all times.

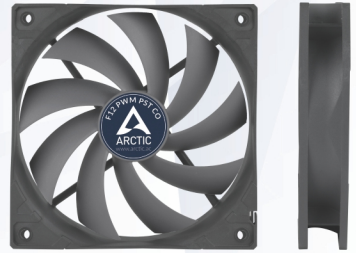

Specifications


Fan	120 mm, 230-1 350 RPM (Controlled by PWM)*
Airflow	53 CFM/90.1 m ³ /h
Bearing	Dual Ball Bearing
Noise Level	0,3 Sone
Voltage/Current	0.12 A/12 V DC
Dimensions	120(L) x 120(W) x 25(H) mm
Weight	109 g

*The minimum speed is tested based on a duty cycle of 10 %


Airflow Directions





PWM Plug Set (PST)



Japanese Dual Ball Bearing



Optimized for Continuous Operation

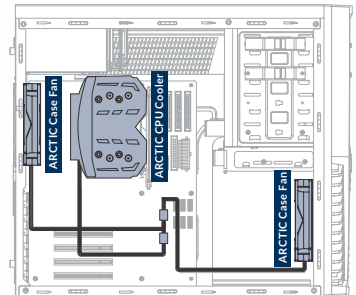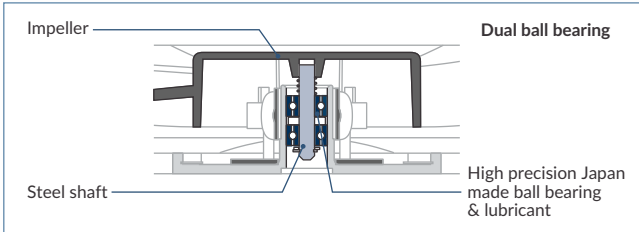

The PST ensures all PWM-controlled devices run at optimized speed (and hence lower noise level) based on actual CPU cooling demand.